

# BEAM

Retail Cash-In Solution


HIGH SECURITY LOCK  
EN 1300  
CLASS B



Z

# Dynamic solution for retail cash management

Network based solution with latest technology brings innovation in day to day cash processing at your retail location. Together with Cloud solution makes daily cash information available across single or multiple sites. Complete real time cash activities report optimizes cash flow operation, and reduces risks of cash shrinkage.

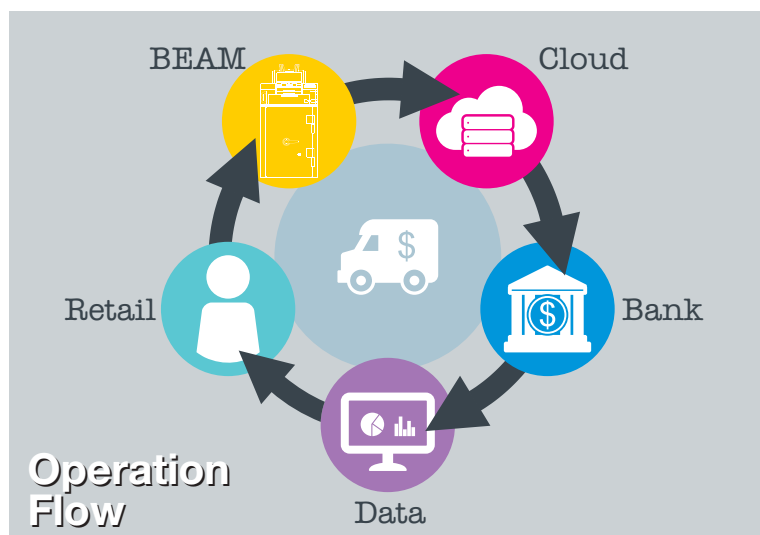

## Features

<b>Convenient</b>	Mixed denomination banknotes handling
<b>Fast</b>	Latest technology applied in deposit system
<b>Efficient</b>	Real time updated direct depositing software
<b>User Friendly</b>	GUI interface with touch screen display
<b>Safe</b>	According to UL291 / CEN IV
<b>Integrated</b>	All info are gathered into Cloud
<b>Interface Protocol</b>	SOAP over HTTP(S), easy to integrate
<b>Unlimited Connection</b>	Connect as many units as desired
<b>Database</b>	Microsoft SQL Server 2008 / 2008 Express

## Functions

- Managements available for:  
*User, Transaction, Safe, Deposit, Bank, CIT, Reports, Error.*
- Depositing Technology  
*100 Notes per deposit | Counting at 600 Notes/min.  
Notes SN Recognition | Supports multi-currency*
- Remote Control
- Preventive Measures



**Masterwork Automodules Tech. Corp.**  
 sales@automodules.com | www.automodules.com  
 TEL : 00886 2 2655 7997 | FAX : 00886 2 2655 7996  
 11F, 114, Sec.1, Xintai 5th Rd, Xizhi, New Taipei City,  
 Taiwan 22102



## Specification

<b>Operating System</b>	Windows 7 / BEAM Application / Cloud
<b>Detection</b>	Banknote Authentication Banknote SN Recognition
<b>Capacity</b>	500 Banknotes (Hopper) 100 Banknotes (Escrow) 50 Banknotes (Reject Pocket) 4000 Banknotes (Security Bag)
<b>Deposit Speed</b>	600 Note/Min.
<b>Countable Note Size</b>	60 x 85 x 0.08mm ~ 100 x 190 x 0.12mm
<b>Display</b>	6" Touch Screen
<b>Barcode Reader</b>	1D Barcode (Standard) 2D Barcode (Optional)
<b>Client Printer</b>	Thermal 58mm
<b>Safe Security Grade</b>	Lock-1, Class B Lock-2, Mechanical or Electronic
<b>Security Bag Sealing</b>	Impulse Sealing
<b>Interface</b>	LAN
<b>Options</b>	RFID Solution, Camera, CEN III Safe
<b>Power Supply</b>	AC110V / 60Hz AC240V / 50Hz
<b>Consumption</b>	Idle 50W / Max. 1000W
<b>Dimension</b>	470 x 577 x 990 mm
<b>Net Weight</b>	194 kg ~ 275Kg

Authorized Dealer